

## SensaSwitch – Overflow Control

Model – OC-1



### Control Function

- It eliminates overflows.
- It automatically stops water pump when overhead water tank reaches full level.
- Motor start remains manual from green push button provided on OC-1.

### Important Features


- Water tank half & low water level indications on panel.
- Red push button to stop motor manually, before it auto-stops.
- Provision to connect extra start switch, away from location of main control unit.
- Pre-connected maintenance free water sensor set to suit most water tanks.
- 25 Amps rated control switch for single phase, single switch operated pumps up to 3 Hp.
- Easy to understand & install with color coded input, output and sensing signal connections.

## Water Sensor Set



- Maintenance free water sensors, for raw (unprocessed tap/ground/ sea) water.
- Not suitable for processed (Dm/ Ro) waters and waste (sewage / storm/ sludge) water.
- Suitable for use in water at normal ambient temperatures (5- 50 degree Celsius).

## Installation & Connections

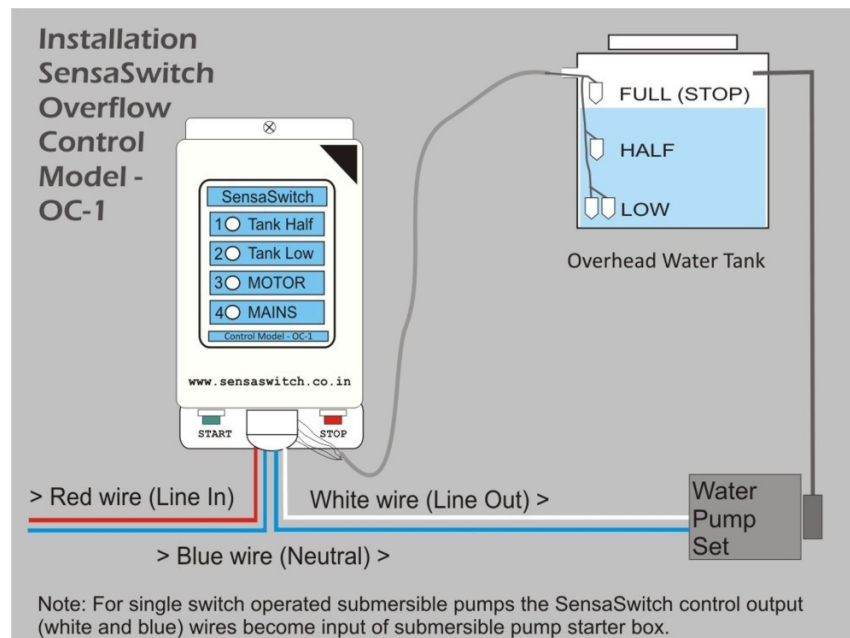

- Main control unit must be installed at a place safe from rain water and splashes.
- Water sensors should be placed in freely hanging position in water tank (no fixing required).
- 2 pair telephone signal wire .40mm copper recommended for use as signal wire.

*Please contact us / send an email to receive detailed product manual*

Call / whatsapp: 9814055314, Email: [mail@sensaswitch.co.in](mailto:mail@sensaswitch.co.in) , Website: [www.sensaswitch.co.in](http://www.sensaswitch.co.in)